

2614 LOOP DRIVEN WALL SOUNDER**APPLICATIONS**

The 2614 Loop Powered Wall Sounder is designed for internal use on addressable fire alarm systems.

**FEATURES**


- Loop Powered
- Single Loop Address - addressed via the Hand Held Programmer
- Low Current Consumption
- Variable Sound output
- 51 User-Selectable Tones
- 100dB(A) output at 1 metre
- Simple Installation
- Weatherproof Kit Available
- Fits Standard or Isolator Base

OPERATION

The 2614 Addressable Loop Driven Wall Sounder is innovatively designed to provide a range of tones and volumes with an output of up to 102dB(A) with low current consumption. The sounder comes complete with a double entry back box for simplified installation, which is IP rated to IP21.

A weatherproof version of the loop driven sounder is also available (Ref 2614/WP). This consists of a specialised back box and gasket set.

APPROVALS : Suitable for use in BS5839 Part 1 :2002 systems.

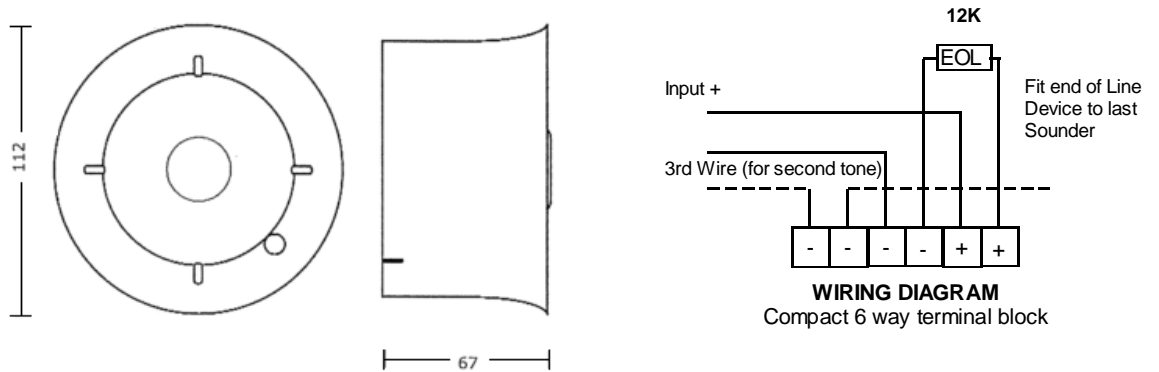

| SPECIFICATION | |
|------------------------------------|--|
| Order Code | 2614 |
| Operating Voltage Range | 17 - 41V DC |
| Quiescent Current (Typical) | 200uA |
| Sounding Current (Typical) | 8mA |
| Sound Output (at 1 metre) | 90 - 102dB(A) +/- 2dB @ 24Vd.c. or above |
| Operating Temperature | -10 ⁰ C to +50 ⁰ C |
| Material | PC ABS |
| Colours | Red or White |
| Weight | 152g |
| Dimensions | 112 H x 112 W x 67 D |
| Ingress Protection | IP21 |
| Maximum Humidity | 95% RH – non Condensing (at 40°C) |



APPROVALS : Suitable for use in BS5839 Part 1 :2002 systems.