

5011 MOULDED EMERGENCY BULKHEAD (SLAVE/MAINS)

APPLICATIONS

The 5011 Moulded Emergency Bulkhead (Slave/Mains) is rated IP65 and is therefore suitable for most internal and external emergency lighting applications. It is ideal for final exits and emergency escape routes in hotels, restaurants, hospitals, schools and commercial premises as well as exterior public areas.



FEATURES

- IP65 Rated
- Strong Prismatic Diffuser
- Opal Diffuser also available
- Attractive Fitting
- 'Snap Shut' hinged gear tray for easy installation
- Reliable
- Recess Bezel available
- Protection Cage available
- Legends Kit available
- Weatherproof
- 3 Hour Emergency Luminaire
- Designed to Comply to ICEL and British Standards


OPERATION

The 5011 Moulded Emergency Bulkhead (Slave/Mains) is illuminated by an 8 watt fluorescent lamp, powered via a Central Battery System. In the event of a mains failure, emergency illumination is provided for 3 hours. The AC/DC Slaves are available as 24 volt, 50 volt, 110 volt and 230 volt versions, with the latter suitable to work direct from the mains. Note, the mains version can not provide emergency illumination backup in the event of a mains failure. A self-contained version of the bulkhead is also available (*Ref 5010*).

The fitting is IP65 rated as standard with the gasket seal factory fitted for convenience. A tough Fresnel Prismatic Diffuser comes as standard, with an Opal Diffuser available as an alternative. An Anti-Tamper Kit can be supplied which retains the Diffuser to the base with anti-tamper screws and for additional security a protection cage can be used (*Ref 5299/1*). A compatible self-adhesive Legends Kit (*Ref 5298/1*) is available to help create inexpensive fire safety signs by fitting a legend panel to the front face of the diffuser.

There is a wide range of ancillary devices and related products which supplements this emergency lighting luminaire range.

APPROVALS : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

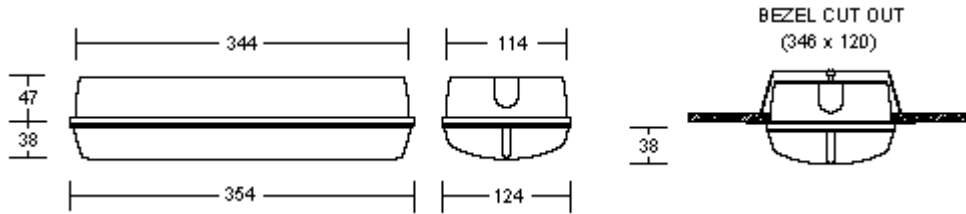

The table below shows the maximum spacing of luminaires which should be utilized to ensure the specified illuminance is met.

Model	Mounting Height (m)	Minimum 0.2 lux				Minimum 0.5 lux				Minimum 1.0 lux			
Slave/ Mains	2.5	6.4	15.6	9.0	4.0	3.4	10.3	7.0	2.9	3.0	9.5	5.7	2.3
	4.0	7.4	19.0	11.5	5.0	3.0	13.0	8.4	3.2	1.5	8.5	5.3	1.6
	6.0	7.2	21.0	12.7	5.1	1.0	11.5	8.4	1.0	n/a	n/a	n/a	n/a

SPECIFICATION

	24V	50V	110V	230V
Order Code	5011/8/24	5011/8/50	5011/8/110	5011/8/230
Input Voltage	24 Volt	50 Volt	110 Volt	230 Volt
Power Rating	8.9VA	7.5VA	7.7VA	13VA
Light Source	1 x 8 watt 300mm Coolwhite Fluorescent Tube			
Light Output	275 Lumens			
Emergency	N/A			
Duration	N/A			
Battery Type	N/A			
Charger	N/A			
Recharge Time	N/A			
Dimensions	354 x 124 x 85			
Weight (Kg)	0.9 Kgs			

Ancillaries:-

- 5295/1 Semi-Recessing Kit
- 5298/1 Self-adhesive Deluxe Legend Kit
- 5299/1 Universal Protection Cage
- Prismatic Diffuser add suffix /P to the Order Code
- Opal Diffuser add suffix /O to the Order Code
- 5299/AT Anti-Tamper Kit