

5330 EMERGENCY LIGHTING WEATHERPROOF TWINSPOTS

APPLICATIONS

The 5330 Emergency Lighting Weatherproof Twinspots is a high light output projector. It is ideal for providing internal or external emergency lighting of all large open areas or undefined emergency escape routes. The 5330 is particularly suitable in industrial or warehouse premises with high ceilings, swimming pools, sports halls and damp or dusty manufacturing environments.



FEATURES

- Slim Modern Design
- Easy Installation
- Reliable
- White Polycarbonate Enclosure
- IP54 Rated
- Fully Adjustable Heads
- Powerful Wide Light Output
- Built in Carrying Handle
- Fitted with 3 Hour Battery Pack
- Bottom Mount Option
- Lamp Monitoring as Standard
- 7Ah SLA Battery
- Weatherproof
- 3 Hour Emergency Lighting
- Designed to Comply with ICEL and British Standards


OPERATION

The 5330 Emergency Lighting Weatherproof Twinspots comprises of wide illumination light beams of two 20 watt Tungsten Halogen lamps. In the event of a mains failure, units are available to provide emergency lighting for 1 or 3 hours, powered via 7Ah SLA Battery. The battery is continually charged so the luminaire can provide full rated duration at any time. The full recharge time for the luminaire is 24 hours, with 14 hours required for 1 hour duration.

The emergency lighting twinspots is constructed in a strong white polycarbonate providing an IP54 rating. The unit has a built in carrying handle and a moulded cable entry gland for ease of installation. The units are fitted with fully adjustable lamp heads, which can be at the top or bottom of the unit. An anti-vandal guard-wire protection cage can be supplied for additional security. Lamp monitoring comes as standard, which provides a method for remotely monitoring the unit from at least one base station.

There is a wide range of ancillary devices and related products which supplements this emergency lighting range.

APPROVALS : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

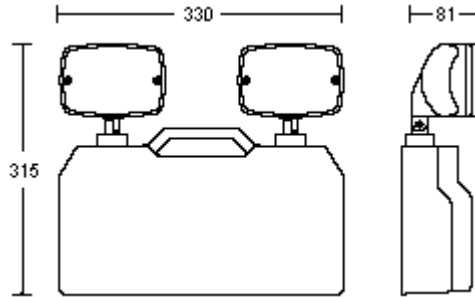

SPECIFICATION

	3 Hour 20 watt IP54
Order Code	5330
Input Voltage	230 Volt AC +/- 10% 50Hz
Power Rating	20VA
Light Source	2 x 20 watt Tungsten Halogen Lamps G4 3022K
Light Output	2 x 400 Lumens
Emergency Duration	3 Hours
Battery Type	2 x 12v 7Ah SLA
Charger	Constant Potential with Green Mains/Charge on LED Indicator
Recharge Time	24 Hours (14 Hours for 1 Hour Duration)
Enclosure	White Polycarbonate
IP Rating	IP54
Dimensions	330 x 315 x 81
Weight (Kg)	5.8

Optional Extras:-
5399 Twinspot Protection Cage