

## 5410 EMERGENCY EXIT SIGN 24m VIEWING DOUBLE SIDED (SELF-CONTAINED)

### APPLICATIONS

The 5410 Emergency Exit Sign 24m Viewing Double Sided (Self Contained) is a slim compact double sided exit luminaire. The sturdy design of the fitting with its clean lines provides an impressive viewing distance of up to 24 metres. The 5410 is suitable for emergency escape route and final exit applications in hotels, restaurants, hospitals, schools and commercial premises.



### FEATURES

- Modern Cost Effective Design
- Strong Double Sided White Steel Enclosure
- Optional Brass Enclosure Finish also available
- Impressive 24m Viewing Distance
- Simple Exit Legend Assembly
- Easy Installation
- Reliable
- Range of Exit Legends available
- Special Legends Kit available
- 4Ah Nickel Cadmium Battery
- 3 Hour Emergency Luminaire
- Designed to Comply with ICEL and British Standards


### OPERATION

The 5410 Emergency Exit Sign 24m Viewing Double Sided (Self Contained) is illuminated by an 8 watt fluorescent tube. In the event of a mains failure, emergency illumination is provided for 3 hours via a Sealed 4Ah Nickel Cadmium Battery. The battery is continually charged so the luminaire can provide full rated duration at any time. The full recharge time for the exit luminaire is 24 hours, with 14 hours required for 1 hour duration. Dual Circuit Technology makes the unit suitable for both maintained and non-maintained applications. A slave version of the exit sign is also available (*Ref 5411*), as is a single sided model (*Ref 5400*).

The 5410 consists of a strong white steel enclosure which allows for simple exit legend assembly, ensuring ease of installation. An optional brass finish enclosure is available to provide an aesthetically pleasing exit sign for high décor areas. A variety of legends kits are available to be supplied with this unit (*please specify on order*), allowing for versatility of application and installation.

There is a wide range of ancillary devices and related products which supplements this emergency exit sign range.

**APPROVALS** : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

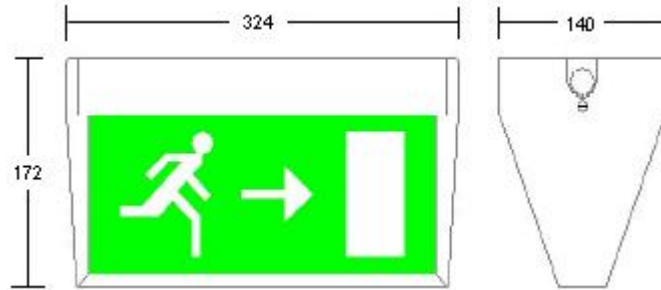

**SPECIFICATION**

	<b>Self Contained Exit Sign (M or NM)</b>
<b>Order Code</b>	5410/8D
<b>Input Voltage</b>	230 Volt AC +/- 10% 50Hz
<b>Power Rating</b>	12VA
<b>Light Source</b>	1 x 8 watt 300mm Coolwhite Fluorescent Tube
<b>Light Output</b>	105 Lumens
<b>Emergency Duration</b>	3 Hours
<b>Battery Type</b>	2.4 Volt 4 Ah Nickel Cadmium
<b>Charger</b>	250mA with Green LED Indicator
<b>Recharge Time</b>	24 Hours (14 Hours for 1 Hour Duration )
<b>Viewing Distance</b>	24 metres
<b>Dimensions</b>	324 x 172 x 140
<b>Weight (Kg)</b>	2.0

**Operational Extras:-**

- 5598/1 Down Arrow Exit Legend
- 5598/2 Reversible Left/Right Exit Legend
- 5598/3 Plain Legend
- 5598/3SP Special Legends
- White Finish add suffix /W to the Order Code
- Brass Finish add suffix /B to the Order Code