

5421 EMERGENCY EXIT SIGN 36m VIEWING (SLAVE/MAINS)

APPLICATIONS

The 5421 Emergency Exit Sign 36m Viewing (Slave/Mains) is a compact exit luminaire. The sturdy design of the fitting with its clean lines provides an impressive viewing distance of up to 36 metres. The 5421 is suitable for emergency escape route and final exit applications in hotels, restaurants, hospitals, schools and commercial premises. A weatherproof version of this unit is available, which is suitable for external emergency lighting applications.



FEATURES

- Modern Cost Effective Design
- Strong White Steel Enclosure
- Optional Brass or Chrome Enclosure
- Finishes also available
- Impressive 36m Viewing Distance
- Designed with 'Down Light' Panel
- Easy Installation
- Reliable
- Protection Cage available
- Range of Exit Legends available
- Weatherproof Version available
- 3 Hour Emergency Luminaire
- Designed to Comply with ICEL and British Standards

OPERATION


The 5421 Emergency Exit Sign 36m Viewing (Slave) is illuminated by an 8 watt fluorescent tube, powered via a Central Battery System. In the event of a mains failure, emergency illumination is provided for 3 hours. The AC/DC Slaves are available as 24 volt, 50 volt, 110 volt and 230 volt versions, with the latter suitable to work direct from the mains. Note, the mains version can not provide emergency illumination backup in the event of a mains failure. A self-contained version of the exit sign is also available (*Ref 5420*), as is a double sided model (*Ref 5431*).

The 5221 consists of a strong white steel enclosure which allows for simple exit legend assembly and its modular construction ensures ease of installation. Optional brass or chrome finish enclosures are available to provide a high quality exit sign for high décor areas. The 'Down Arrow' legend is fitted as standard, with a variety of optional legend kits available as alternatives. An anti-vandal guard-wire protection cage can be supplied for additional security (*Ref 5599*).

This model is also designed with a 'Down Light' panel, which provides generous illumination at floor level.

There is a wide range of ancillary devices and related products which supplements this emergency exit sign range.

APPROVALS : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

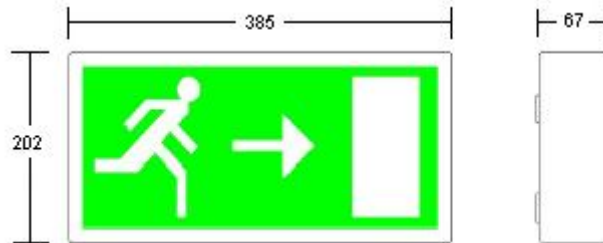

SPECIFICATION

	24V	50V	110V	230V
Order Code	5421/8/24	5421/8/50	5421/8/110	5421/8/230
Input Voltage	24 Volt	50 Volt	110 Volt	230 Volt
Power Rating	8.9VA	7.5VA	7.7VA	13VA
Light Source	1 x 8 watt 300mm Coolwhite Fluorescent Tube			
Light Output	275 Lumens			
Emergency Duration	N/A			
Battery Type	N/A			
Charger	N/A			
Recharge Time	N/A			
Viewing Distance	36 metres			
Dimensions	324 x 172 x 140			
Weight (Kg)	1.5			

Optional Extras:-

- 5597/B Brass Effect Legend Retaining Skirt
- 5597/C Chrome Effect Legend Retaining Skirt
- 5598/4 Down Arrow Exit Legend
- 5598/5 Reversible Left/Right Exit Legend
- 5598/6 Plain Legend
- 5598/6SP Special Legend
- 5599 Exit Sign Protection Cage
- Weatherproof Version add suffix /WP to the Order Code