

5461 HANGING EMERGENCY EXIT SIGN (SLAVE/MAINS)

APPLICATIONS

The 5461 Hanging Emergency Exit Sign (Slave/Mains) is a highly functional double sided exit luminaire. The sturdy design of the fitting with its clean lines provides an impressive viewing distance of up to 26 metres. The 5461 is suitable for emergency escape route and final exit applications in hotels, restaurants, hospitals, schools and commercial premises.



FEATURES

- Modern Cost Effective Design
- Strong White Steel Fixture
- Optional Brass or Chrome Finishes also available
- Matching Connection Box
- Impressive 26m Viewing Distance
- Easy Installation
- Reliable
- Heavy Duty Polished Exit Blade
- Double Sided Legend
- Range of Exit Legends available
- 4Ah Nickel Cadmium Battery
- 3 Hour Emergency Luminaire
- Designed to Comply with ICEL and British Standards


OPERATION

The 5461 Hanging Emergency Exit Sign (Slave/Mains) operates an 8 watt fluorescent tube, powered via a Central Battery System, which provides uniform and complete illumination of the legend panel from its top edge. In the event of a mains failure, emergency illumination is provided for 3 hours. The AC/DC Slaves are available as 24 volt, 50 volt, 110 volt and 230 volt versions, with the latter suitable to work direct from the mains. Note, the mains version can not provide emergency illumination backup in the event of a mains failure. A self-contained version of the exit sign is also available (Ref 5460).

The 5461 consists of a heavy duty polished exit blade containing a double sided exit legend, which is attached to a strong white hanging fixture with matching connection box. Optional brass or chrome finish fixtures are available to provide a high quality exit sign for high décor areas. A variety of legends kits are available to be supplied with this unit (*please specify on order*), allowing for versatility of application and installation.

There is a wide range of ancillary devices and related products which supplements this emergency exit sign range.

APPROVALS : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

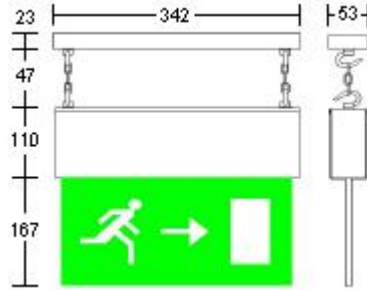

SPECIFICATION

	24V	50V	110V	230V
Order Code	5461/8/24	5461/8/50	5461/8/110	5461/8/230
Input Voltage	24 Volt	50 Volt	110 Volt	230 Volt
Power Rating	8.9VA	7.5VA	7.7VA	13VA
Light Source	1 x 8 watt 300mm Coolwhite Fluorescent Tube			
Light Output	275 Lumens			
Emergency Duration	N/A			
Battery Type	N/A			
Charger	N/A			
Recharge Time	N/A			
Viewing Distance	26 metres			
Dimensions	342 x 53 x 347			
Weight (Kg)	2.1			

Optional Extras:-
 5598/7 Down Arrow Exit Legend
 5598/8 Reversible Left/Right Exit Legend
 5598/9 Plain Legend
 5598/9SP Special Legend