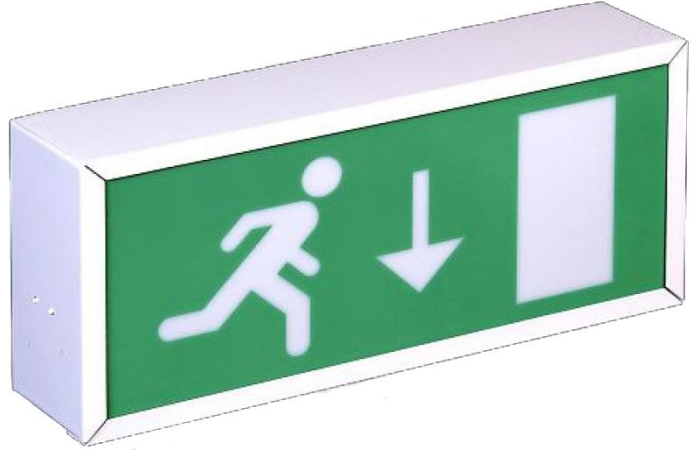


5400 EMERGENCY EXIT SIGN 24m VIEWING (SELF-CONTAINED)**APPLICATIONS**

The 5400 Emergency Exit Sign 24m Viewing (Self Contained) is a slim compact exit luminaire. The sturdy design of the fitting with its clean lines provides an impressive viewing distance of up to 24 metres. The 5400 is suitable for emergency escape route and final exit applications in hotels, restaurants, hospitals, schools and commercial premises.

**FEATURES**

- Modern Cost Effective Design
- Strong Steel Enclosure
- Impressive 24m Viewing Distance
- Simple Exit Legend Assembly
- Easy Installation
- Reliable
- Protection Cage available
- Range of Exit Legends available
- Special Legends Kit available
- 4Ah Nickel Cadmium Battery
- 3 Hour Emergency Luminaire
- Designed to Comply with ICEL and British Standards


OPERATION

The 5400 Emergency Exit Sign 24m Viewing (Self Contained) is illuminated by an 8 watt fluorescent tube. In the event of a mains failure, emergency illumination is provided for 3 hours via a Sealed 4Ah Nickel Cadmium Battery. The battery is continually charged so the luminaire can provide full rated duration at any time. The full recharge time for the exit luminaire is 24 hours, with 14 hours required for 1 hour duration. Dual Circuit Technology makes the unit suitable for both maintained and non-maintained applications. A slave version of the exit sign is also available (*Ref 5401*), as is a double sided model (*Ref 5410*).

The 5400 consists of a strong steel enclosure which allows for simple exit legend assembly, ensuring ease of installation. The 'Down Arrow' legend is fitted as standard, with a variety of optional legend kits available as alternatives. An anti-vandal guard-wire protection cage (*Ref 5299/1*) can be supplied for additional security.

There is a wide range of ancillary devices and related products which supplements this emergency exit sign range.

APPROVALS : Designed to conform to ICEL 1001: 1999 and BS EN 60598-2-22 1999

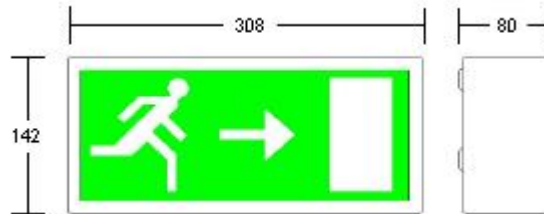

SPECIFICATION

	Self Contained Exit Sign (M or NM)
Order Code	5400/8D
Input Voltage	230 Volt AC +/- 10% 50Hz
Power Rating	12VA
Light Source	1 x 8 watt 300mm Coolwhite Fluorescent Tube
Light Output	105 Lumens
Emergency Duration	3 Hours
Battery Type	2.4 Volt 4 Ah Nickel Cadmium
Charger	250mA with Green LED Indicator
Recharge Time	24 Hours (14 Hours for 1 Hour Duration)
Viewing Distance	24 metres
Dimensions	308 x 142 x 80
Weight (Kg)	2.0

Optional Extras:-

- 5598/1 Down Arrow Exit Legend
- 5598/2 Reversible Left/Right Exit Legend
- 5598/3 Plain Legend
- 5598/3SP Special Legends
- 5299/1 Universal Protection Cage